


CRISTAL



Perfumed water - dilutable paint

Good breathability

It is suitable for internal spaces

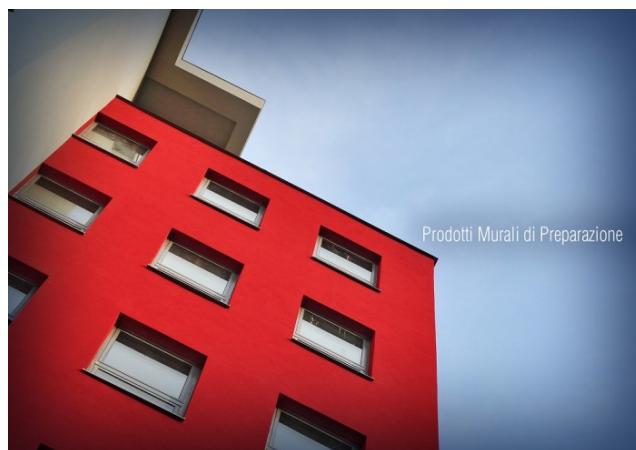

Code

0884

Description

Perfumed water - based paint made of copolymers and synthetic pigments that give the product the following characteristics: high coverage, ease of application, excellent elasticity and whiteness. The dry film offers a pleasant satin appearance and it allows a perfect breathability of the surfaces.

Use

It is suitable for any internal walls

Appearance of the film

Matt

Color

White

Component

1

Hardening

Physical hardening through evaporation of water and union of the polymer

Specific weight

From 1,700 gr / ml

VOC

30 gr/ liter

Estimated yield

8 - 9 m² / litre for the smooth supports with medium absorption

Flash point

Component A > 114°C

Preparation of surfaces

New surfaces:

Make sure that the supports are completely dry. If there are molds, treat the surface with suitable restoring products.

Remove any efflorescence and paints that are peeling off with brushes and washes.

Prime the surface with a vinyl fixative product diluted in a ratio of 1 litre of insulating product with 8 - 10 litres of water.

Old surfaces:

Remove old paints that are peeling off. Tempera and lime paintings must be removed with brushes and washes.

Prime the surface with a vinyl fixative product diluted in a ratio of 1 litre of insulating product with 8 - 10 litres of water.

Preparation of the product

Mix the product before the use and add water

Component A	100
Water	1° coat 20 - 25 %
	2° coat 10 - 15 %

Environmental conditions

Ambient temperature: from + 5 to 40° C

Temperature of the support: > 10° C

Humidity: 0 - 80 %

In order to prevent the formation of condensation, it is necessary that the temperature of the substrate is at least 3° C above the dew point.

Drying and hardening time

For the thickness of 50 microns	10° C	20° C	30° C	
Dry to touch	3	1	0,5	hours
Dry in depth	8	4 - 5	2	hours

Time of overpainting

Minimum (hours)	10° C	20° C	30° C
	8	4	3 hours
Maximum	unlimited in the absence of contaminants		

Application

Brush, roller
If you use the brush, you have to use nylon or natural bristle brushes.
If you use the roller, you have to use medium - haired rollers.
For the application, it is necessary to use the method of crossing coats.

Shelf life

2 years in a cool and dry place (max 40° C)

Packs

Comp A Lt. 14 Lt. 5 Lt. 2,5

