
Scheda Tecnica

FULL 2000



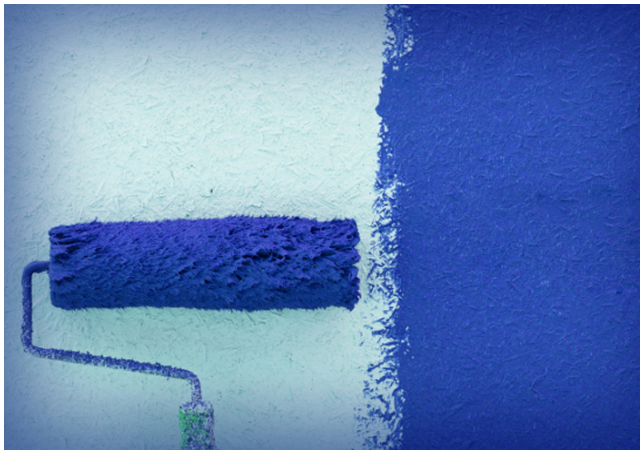

- Water – dilutable matt paint
- Good breathability
- It is suitable for internal spaces

Code	0812
Description	Water paint based on vinylversatic resin; it is breathable and it has a good coverage.
Use	It can be applied on old and new plasters, concrete surfaces, gypsum and plasterboard, old paints, and so on. « FULL 2000 » has a good high flexibility in application, coverage and resistance to the dry abrasion.
Appearance of the film	matt
colour	white
Component	1
Hardening	Physical hardening through evaporation of water and union of the polymer

Copyright 2026 Resina Color - z.i. Via Mastricale 3 - 70017 Putignano (BA) - Italy
tel. 0804912873 - email: info@resinacolor.it p.i. 09040010721
www.resinacolor.com - www.resinacolor.it

Specific weight	From 1,700 gr/ml
VOC	30 gr/ litre
Estimated yield	8 – 9 m² / litre for the smooth supports with medium absorption
Flash point	Component A > 114° C
Preparation of surfaces	New surfaces: Make sure that the supports are completely dry. If there are molds, treat the surface with suitable products. Remove possible efflorescence and paints that are peeling off with brushes and washes. Prime the surface with an acrylic fixative product. Old surfaces: Remove old paints that are peeling off. Tempera and lime paintings must be removed with brushes and washes.
Preparation of the product	Mix the product before the use and add water: Component A 100 Water max 25 - 30 % (first coat) max 10 - 15 % (second coat)
Environmental conditions	Ambient temperature: from + 8 to 40° C Temperature of the support: > 10° C Humidity: 0 – 80 % In order to prevent the formation of condensation, it is necessary that the temperature of the substrate is at least 3° C above the dew point.

Drying and hardening time	10° C	20° C	30° C
For the thickness of 50 microns			
Dry to touch	3	1	0,5 hours
Dry in depth	8	4 -5	2 hours

Time of overpainting	10° C	20° C	30° C
Minimum (hours)	8	4	3 hours
Maximum unlimited in the absence of contaminants			

Application	Brush, roller If you use the brush, you have to use nylon or natural bristle brushes.

Copyright 2026 Resina Color - z.i. Via Mastricale 3 - 70017 Putignano (BA) - Italy
tel. 0804912873 - email: info@resinacolor.it p.i. 09040010721
www.resinacolor.com - www.resinacolor.it

	If you use the roller, you have to use medium-haired rollers. For the application, it is necessary to use the method of crossing coats.
Shelf life	2 years in a cool and dry place (max 40° C)
Packs	Comp A: Lt. 14; Lt. 4; Lt. 2,5

Copyright 2026 Resina Color - z.i. Via Mastricale 3 - 70017 Putignano (BA) - Italy
tel. 0804912873 - email: info@resinacolor.it p.i. 09040010721
www.resinacolor.com - www.resinacolor.it