


IDROREP S 15



Water - repellent

Excellent penetration

Breathable product without film

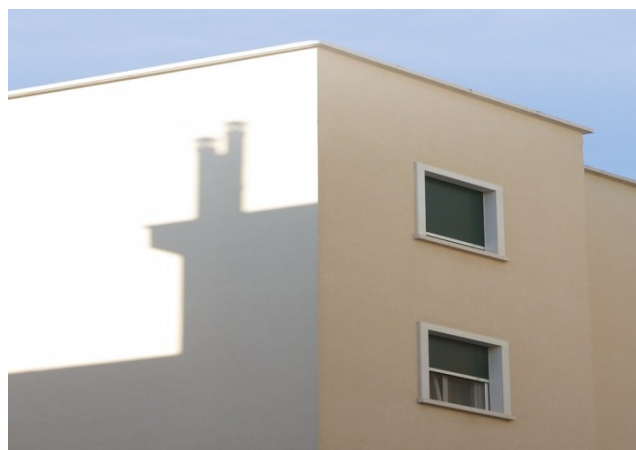

Code

0605

Description

Alkyl siloxane solution, in solvents, resistant to alkali and to the weather.

Use

This product is suitable as a water - repellent for various mineral substrates; it has an excellent penetration, reduces water absorption and preserves the original appearance of the substrate (without film).
It can be applied on concrete surfaces, reinforced concrete, stones, plasters and brick infills.
It is not recommended on old paints and on substrates that are not absorbent, such as polished marble, granite and plaster.

Appearance

Colorless liquid

Component

1

Hardening

Evaporaton of the solvent and reaction with ambient humidity.

Specific weight	0,80 gr / ml
Estimated yield	Depending on the absorption of the substrate from 0,25 to 1 litre / m ²
flash point	34°C
Preparation of surfaces	Normally only a dust removal is provided for; in the case of surfaces with scaling or stubborn dirt, proceed with a power wash. In the presence of mold, perform an appropriate anti - mold treatment. On dry and absorbent substrates, apply more coats of « Idrorep S 15 », wet on wet until waste.
Preparation of the product	Thinning: product ready to use. Apply more coats, without intervals between coats (wet on wet), up to full saturation of the substrate
Drying and hardening time	At 20° C and 65 % UR About 24 hours to carry out water - repellent action
Packs	Comp. A Lt. 25 Lt. 5 Lt. 1
Shelf life	2 years in a cool and dry place (max 40° C)