


MURALCOLOR



Water - repellent product based on water

Excellent penetration

Breathable product without film

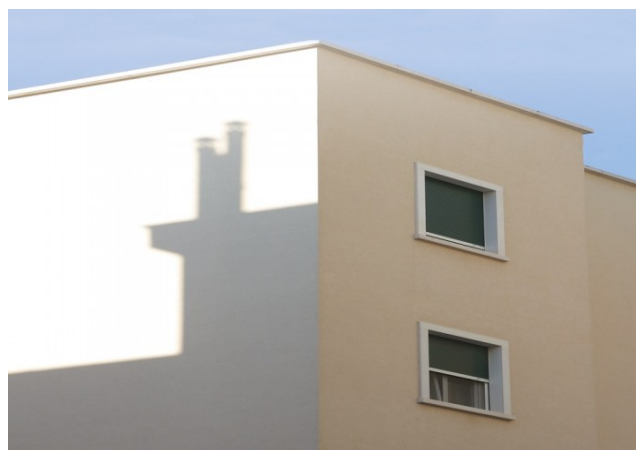

Code

0607

Description

Acryl - siloxane solution in water, resistant to alkali and to the weather.

Use

This product is suitable as a water - repellent for various mineral substrates; it has an excellent penetration, reduces water absorption and preserves the original appearance of the substrate (without film).
It can be applied on concrete surfaces, reinforced concrete, stones, plasters and brick infills.
It is not recommended on old paints and on substrates that are not absorbent, such as polished marble, granite and plaster.

Appearance of the film

Milky liquid

Component

1

Hardening

Evaporation of water

Specific weight

1,050 gr / ml

Estimated yield

Depending on the absorption of the substrate from 0,25 to 1 litre / m²

flash point

Not inflammable

Preparation of surfaces

Normally only a dust removal is provided for; in the case of surfaces with scaling or stubborn dirt, proceed with a power wash.
In the presence of molds, perform an appropriate anti - mold treatment.

Environmental conditions

Ambient temperature: from + 8 to 35° C
Temperature of the support: > 5° C
Humidity: 0 - 75 %

Drying and hardening time

At 20° C and 65 % UR
About 24 hours to carry out water - repellent action

Packs

Comp. A Lt. 20 Lt. 5 Lt. 1

Shelf life

2 years in a cool and dry place (max 40° C)