


PRIMER ALLA PLIOLITE



Unsaponifiable and resistant to the weather.

It is used as anti - dust for concrete screeds.

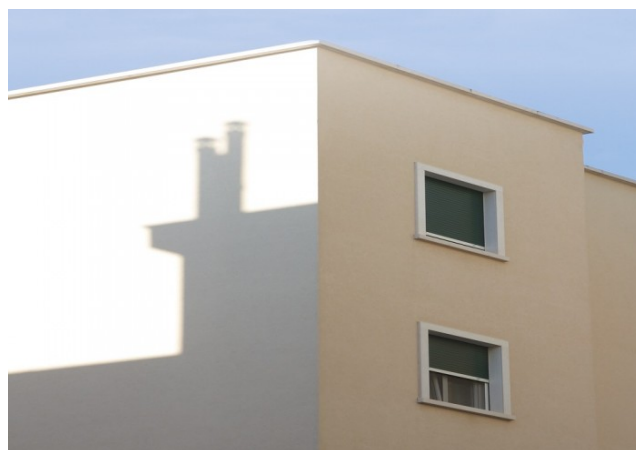

Code

0604

Description

Transparent product based on acrylic - styrene resins such as « Pliolite Good Year ».

Use

This product is used as a fixative insulating product for alkaline substrates before the application of emulsion or solvent - based paints. It can be used as anti - dust for concrete floors

Appearance of the film

Semi - glossy

Color

Opalescent transparent

Component

1

Hardening

Physical hardening through evaporation of solvents

Specific weight	0,920 gr/ml			
Volume of solids	20 %			
VOC	600 gr/ liter			
Minimum thickness	20 - 30 micron			
Estimated yield	10 m² / litre for a thickness of 20 microns			
Flash point	Component A	34°C		
	Thinner	34°C		
Preparation of surfaces	The substrates must be mature and clean			
Preparation of the product	Component A	100		
	Product ready to use			
Environmental conditions	Ambient temperature: from + 5 to 40° C Temperature of the support: > 10° C Humidity: 0 - 85 % In order to prevent the formation of condensation, it is necessary that the temperature of the substrate is at least 3° C above the dew point			
Drying and hardening time	For the thickness of 40 microns	10° C	20° C	30° C
	Dry to touch	2	1	0,5 hours
	Dry in depth	24	8	4 hours

Time of overpainting

unlimited in the absence of contaminants

Application

Brush, roller, spray

If you use the brush, you have to use nylon or natural bristle brushes.

If you use the roller, you have to use medium - haired rollers.

For the application, it is necessary to use the method of crossing coats

Shelf life

2 years in a cool and dry place (max 40° C)

Packs

Comp A 25 l , 5l, 1l.

