


BIANCO CASA



Water borne matt painting

Good breathability

Suitable for indoor

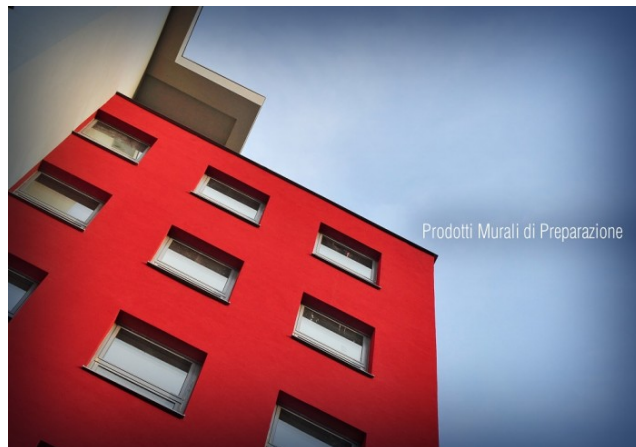

Prodotti Murali di Preparazione

Description

Water borne paint based on vinylversatic resin, with good coverage

Use

Can be applied to new or old plaster, concrete, gypsum and plasterboard, old paintings. Has a good brushability, good coverage and abrasion resistance to dry.

Film appearance

Matt

Color

white

Component

1

Hardening

Water evaporation and polymer coalescence

Density

1,690 - 1,720 gr / ml

VOC

30 gr/ liter

Theoretical coverage

8 - 9 mq / litres on smooth substrates in the medium absorption.

flash point

Component A > 114°C

Surface preparation

New surfaces:
Make sure that the media is completely dry, in the presence of mold, treat the surface with suitable restorative.
Remove any efflorescence and loose paint by brushing and washing.
Prime with insulating acrylic.
Old coatings:
Remove old paint flaking, tempera paints and lime must be removed by brushing and washing

Paint preparation

Mix paint dilute with water
1° hand 20 - 25%
2° hand 10 - 15%

Environmental conditions

Temperatures: da + 5 a 35°C
Surface temperature: > di 5°C
Umidità: 0 - 75 %

Drying and hardening time

	10°C	20°C	30°C	
Dry to touch	3	1	0,5	hours
Dry in depth	6	2	1	hours

Time of overpainting

	10°C	20°C	30°C
Minimum	6	2	1
Maximum	unlimited in the absence of contaminants		

Application

Roller, brush, spray

Shelf life

Two years in a cold, dry (max 40°C)

Packs

Comp A Lt. 14; Lt. 5; Lt. 2,5.