


BIANCO TIX



Water - dilutable paint

Excellent coverage

Breathable for internal spaces

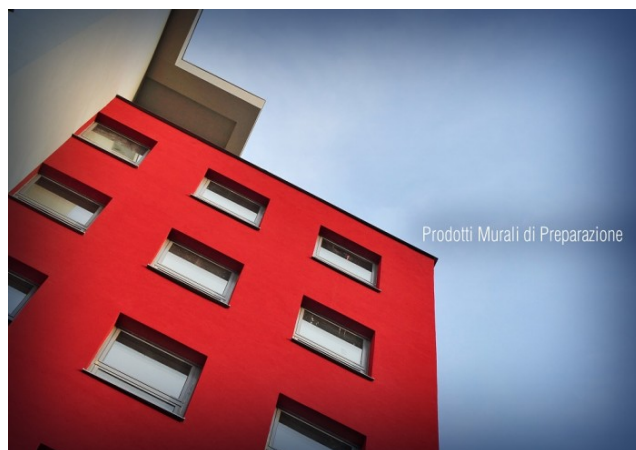

Code

0814

Description

Paint in emulsion based on vinylversatic resin in water dispersion.

Use

This product is indicated for the painting of interior wall surfaces; it has a good covering power and it is breathable. It is easy to apply for its anti - drip power.

Appearance of the film

Matt

Color

White

Component

1

Hardening

Physical hardening through evaporation of water and union of the polymer

Peso specifico

Da 1,700 gr/ml

VOC

15 gr/ liter

Estimated yield

8 - 9 mq / liter for the smooth supports with medium absorption

Flash point

Component A > 114°C

Preparation of surfaces

New surfaces:
New plasters or patches must be well cured, clean, dry and free from white layers.
In the presence of mold, treat the surface with suitable restoring products.
Remove any efflorescence with brushing or washing.
Prime clean surfaces with water - based acrylic fixative products.
Already painted surfaces:
Remove old paints that are peeling off. Tempera and lime paintings must be completely removed with brushes and washes.

Preparation of the product

Mix the product before the use and add water:

Component A	100		
Water	max	25 - 30 %	(first coat)
	max	10 - 15 %	(second coat)

Environmental conditions

Ambient temperature: from + 8 to 40° C
Temperature of the support: > 10° C
Humidity: 0 - 80 %
In order to prevent the formation of condensation, it is necessary that the temperature of the substrate is at least 3° C above the dew point.

Precautions:

- Do not apply on wet or not well cured supports;
- Do not apply at temperature below 10° C;
- Do not apply when humidity is above 80 %, in case of imminent rain and in the presence of wind.

Drying and hardening times

	10°C	20°C	30°C
Dry to touch:	4,	1,	0,5 hours
Dry in depth:	8,	4,	2 hours

Time for overpainting

	10°C	20°C	30°C
Minimum (hours)	8	4	2 hours
Maximum	unlimited in the absence of contaminants		

Application

Brush, roller
If you use the brush, you have to use nylon or natural bristle brushes.
If you use the roller, you have to use medium - haired rollers.
For the application, it is necessary to use the method of crossing coats.

Shelf life

2 years in a cool and dry place (max 40° C)

Packs

L 14 L 5 L 2.5