


IDROCOLORE ACRILICO



Acrylic water paint

Excellent washability

Use indoor or outdoor

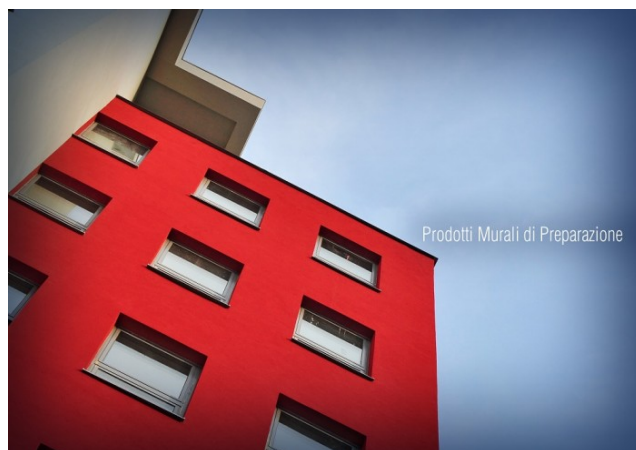

Description

Based on acrylic resin and resistant pigments. Is a washable paint, suitable for applications both inside and outside walls. Easy to apply and form an opaque and velvety film.

Use

Can be applied to suitable prepared plaster or concrete wall surfaces, which require a good appearance with excellent resistance to washing with detergents.

Appearance of the film

matt

Colour

White and colour chart

Component

1

Hardening

Water evaporation and polymer coalescence

Specific weight

From 1,620 gr/ml

VOC

40 gr/ liter

Theoretical yield

8 – 9 mq / liter

washability

6000 touches

Flash point

Component A > 114°C

resistance to temperature

Max 60°C

Surface preparation

New surfaces:
Prime with insulating acrylic. In the presence of surface with high alkalinity, use a insulating resin based alkali resistant.
The same treatment is recommended in case of surfaces treated with lime or chalking paints

Paint preparation

Mix the paint and dilute with water
Maximum 40%

Environmental conditions

Temperatures: da + 5 a 35°C
Surface temperature: > di 5°C
Umidity: 0 – 75 %

Curing times

	10°C	20°C	30°C	
Dry to touch	3	1	0,5	hours
Dry	8	6	2	hours

Overcoating time

	10°C	20°C	30°C	
Minimum	8	6	2	hours
Maximum	unlimited in the absence of contaminants			

Application

Roller, brush, spray

Shelf life

Two years in a cold, dry (max 40°C)

Packs

Comp A Lt. 14 Lt. 5 Lt. 2,5

