


PRIMER PER RESINGUAINA



Unsaponifiable and resistant to the weather.

It is used as anti - dust for concrete screeds.

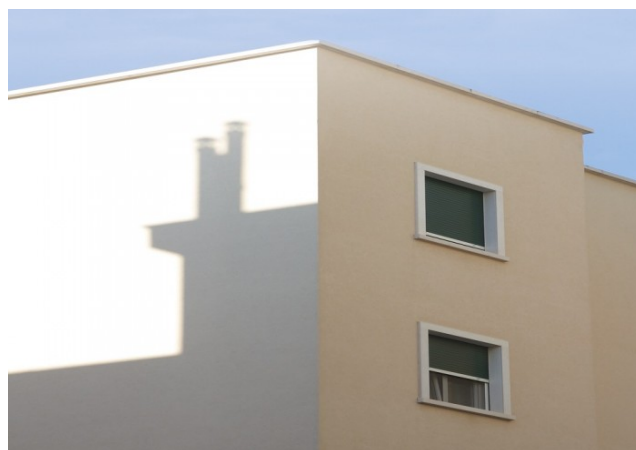

Code	0611
Description	Transparent product based on acrylic - styrene resins such as « Pliolite Good Year ».
Use	This product is used as a fixative insulating product for alkaline substrates before the application of emulsion or solvent - based paints. It can be used as anti - dust for concrete floors.
Appearance of the film	Semi - glossy
Colour	Semi - glossy
Component	1
Hardening	Physical hardening through evaporation of solvents
Specific weight	0,920 gr/ml

Volume of solids	20 %
VOC	600 gr/ liter
Minimum thickness	20 - 30 micron
Estimated yield	10 m ² / litre for a thickness of 20 microns
Flash point	<div>Component A 34°C</div> <div>Thinner 34°C</div>
Temperature resistance	50° C continuously, 140° C discontinuously.
Preparation of surfaces	The substrates must be mature and clean
Preparation of the product	<div>Component A 100</div> <div>Product ready to use</div>
Environmental conditions	<div>Ambient temperature: from + 5 to 40° C</div> <div>Temperature of the support: > 10° C</div> <div>Humidity: 0 - 85 %</div> <div>In order to prevent the formation of condensation, it is necessary that the temperature of the substrate is at least 3° C above the dew point.</div>

Drying and hardening time

For the thickness of 40 microns	10° C	20° C	30° C
Dry to touch	2	1	0,5 hours
Dry in depth	24	8	4 hours

Time of overpainting

unlimited in the absence of contaminants

Application

Brush, roller, spray
If you use the brush, you have to use nylon or natural bristle brushes.
If you use the roller, you have to use medium - haired rollers.
For the application, it is necessary to use the method of crossing coats.

Shelf life

2 years in a cool and dry place (max 40° C)

Packs

Comp A 25 l , 5l, 1l.