


RASACOLOR



Pigmented primer

Good filling power

Suitable for leveling and masking imperfections

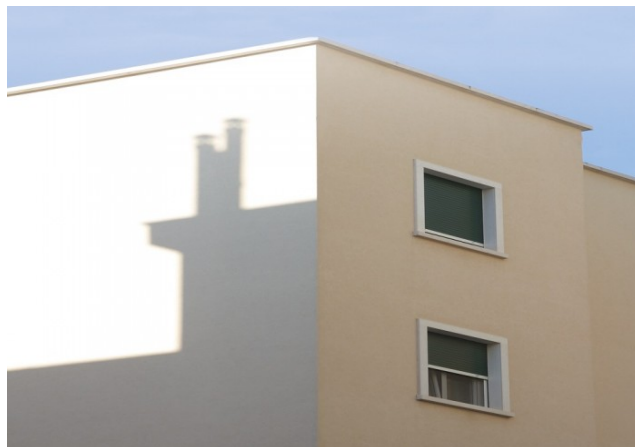

Code

0618

Description

Pigmented primer based on modified acrylic emulsions.

Use

This product is used as a filler and a masking product of the imperfections of the substrates. It is applicable on new and old plasters based on hydraulic binders, plaster and plasterboard surfaces, old paints as long as they are well adherent, on different substrates provided they are absorbent. It is not recommended in lime or silicate cycles.

Appearance of the film

matt

Colour

White and color chart

Component

1

Hardening

Fisico per evaporazione e coalescenza del polimero

Specific weight	1,530 gr/ml			
Volume of solids	56 %			
VOC	105 gr/ liter			
Estimated yield	1.000 Kg/mq			
Preparation of surfaces	Make sure that the substrate is well dry; remove by brushing any efflorescence, all parts of old paints that are peeling off. Completely eliminate old layers of lime or tempera paints.			
Preparation of the product	Mix the product before the use. For applications with a spatula, the product must not be diluted.			
Environmental conditions	Ambient temperature: from + 5 to 40° C Temperature of the support: > 5° C Humidity: 0 - 75 % Avoid the application in the presence of surface condensation or under direct sunlight.			
Drying and hardening time	For the thickness of 200 microns	10° C	20° C	30° C
	Dry to touch	24	6	1 hours
	Dry in depth	24	8	2 hours
Time of overpainting	Minimum (hours)	10° C	20° C	30° C
		8	4	3 hours
	Maximum	unlimited in the absence of contaminants		
Application	Use a steel spatula			

Shelf life

2 years in a cool and dry place (max 40° C)

Packs

Comp A Kg. 24

