


RESINZINC



Oleophenolic primer

It has an excellent anti - corrosion protection

In compliance with ENEL technical specifications

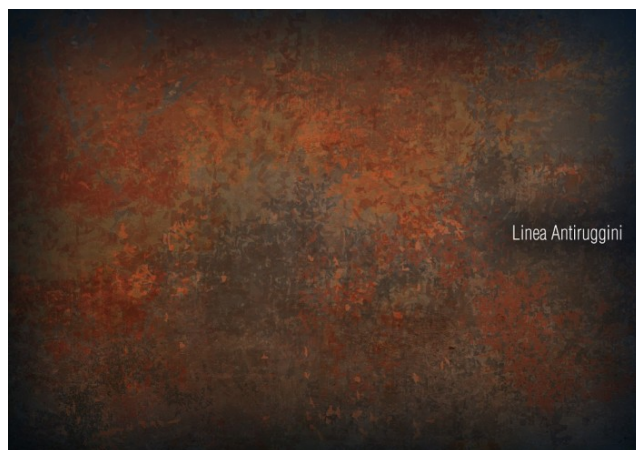

Linea Antiruggini

Code

0501

Description

Oleophenolic primer which has a dual anti - corrosive action, chemical and with barrier effect.

Use

Primer for sandblasted steel at the grade SA 2 or brushed steel according to the grade CST3 of Sensk Standard SIS 1967. It is covered with synthetic finishes such as "Resing", "Toplac", "Novolux", "Resilux".

Appearance of the film

Matt

Color

Red, grey

Component

1

Hardening

Physical hardening through evaporation of solvents and oxidative polymerization

Specific weight

1,520 gr/ml

Volume of solids	61 %
VOC	306 gr/ liter
Minimum thickness	40 - 50 micron
Estimated yield	15 m ² / liter for a thickness of 40 microns
Flash point	Component A 34°C Thinner 34°C
Temperature resistance	100° C continuously, 140 ° C discontinuously.
Salt spray resistance	Thickness 80 microns 1000 hours, neither blistering, nor propagation of rust.
Preparation of surfaces	New steel: SA 2 sandblasting or brushing, in any case clean surfaces. Old paints: Brushing, dust removal
Preparation of the product	Mix the product before the use and add the thinner Component A 100 Thinner 5 - 10 % depending on the thickness of the dry film to be applied
Environmental conditions	Ambient temperature: from + 5 to 40° C Temperature of the support: > 10° C Humidity: 0 - 85 % In order to prevent the formation of condensation, it is necessary that the temperature of the substrate is at least 3° C above the dew point.

Drying and hardening time

For the thickness of 45 microns	10° C	20° C	30° C
Dry to touch	6	3	2 hours
Dry in depth	48	24	10 hours

Time of overpainting

Minimum (hours)	10° C	20° C	30° C
	24	12	6 hours
Maximum	unlimited in the absence of contaminants		

Application

Brush, roller, spray
If you use the brush, you have to use nylon or natural bristle brushes.
If you use the roller, you have to use medium - haired rollers.
For the application, it is necessary to use the method of crossing coats.

Shelf life

2 years in a cool and dry place (max 40° C)

Packs

Comp A 2,5 lt. 0,500 lt. Thinner 5 lt, 25 lt