


Epofond Zinc



High, solid, epoxy primer based on zinc phosphate

It has an excellent anti - corrosive action

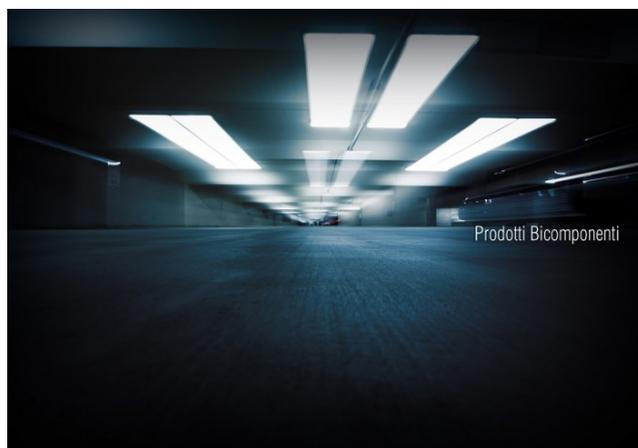

Code	0214
Description	It is an epoxy - polyamide primer: it has an effective anti - corrosive action with barrier effect and it adheres on many substrates such as aluminum, fiberglass, galvanized sheet metal, and so on.
Use	This product is used as a primer for epoxy and polyurethane cycles in environments with medium and high aggressiveness.
Appearance of the film	Matt
Colour	Grey - green
Components	2
Hardening	Chemical reaction between two components
Specific weight	1,410 gr/ml (A + B)

Volume of solids	56%
Voc	500 gr/liter
Minimum thickness	75 microns
Estimated yield	7.4 m ² / litre for a thickness of 75 microns
Flash point	Component A: 27°C Component B: 34°C Thinner : 27°C
Adhesion	On sandblasted steel: 8MPa, on brushed metal 4MPa
Abrasion resistance	65 mg CS 17 1Kg 1000 cycles
Salt spray resistance	> 1500 hours
Temperature resistance	Max 120° C continuously, 200° C discontinuously
Preparation of surfaces	Oxidised steel without calamine: Mechanical cleaning at the grade St3, of Svensk Standard SIS 1967 for cycles that are not subject to immersion. SA 2 ½ sandblasting for cycles that are subject to immersion
Preparation of the product	Mix the product according to the following ratio by weight: Component A : 100 Component B: 15 Mix Component A separately and then add Component B and mix together
Induction time	Not expected

Pot life	> 8 hours a 20°C			
Thinning	5 - 10 % with an epoxy thinner depending on the applications			
Environmental conditions	Ambient temperature: from + 10 to 35° C Temperature of the support: > 10° C Humidity: 0 - 70 % In order to prevent the formation of condensation, it is necessary that the temperature of the substrate is at least 3° C above the dew point.			
Drying and hardening time	For the thickness of 100 microns (wet)	10° C	20° C	30° C
	Dry to touch	6	3	2 hours
	Dry in depth	10	6	4 hours
Time of overpainting	Minimum (hours)	10° C	20° C	30° C
		10	8	5 hours
	Maximum (months)		1	
Application	Brush, roller, airless, spray If you use the brush, you have to use nylon or pure bristle brushes. If you use the roller, you have to use medium - haired rollers. For the application, use the method of crossing coats. Airless: Nozzle size: 0,46 mm (0,018 inch) Air pressure: 150 bar			
Shelf life	2 years in a cool and dry place (max 40° C)			
Packs	Kg. 12,000 (10+2) Kg. 4,800 (4 + 0,800) Kg. 1,200 (1 + 0,200)			